

Request For Quotation

Order the parts you need from our real-time inventory database. Simply complete a request for quotation form with your part information and a sales representative will respond to you with price and availability.

[Request For Quotation](#)

Your free datasheet starts on the next page.

More datasheets and data books are available from our homepage: <http://www.datasheetarchive.com>

■ MN1880024 / 4824 / 3224 / 2424

Type		MN1880024 / 4824 / 3224 / 2424	
ROM (x8-bit)		External / 48K / 32K / 24K	
RAM (x8-bit)		704 / 928 / 928	
Minimum Instruction Execution Time	With Main Clock operated	0.200µs (at 4.5 to 5.5V, 20MHz)	
		0.400µs (at 3.0 to 5.5V, 10MHz) : MN1884824 only	
	With Sub-clock operated	122µs (at 2.7 to 4.0V, 32.768kHz)	
Interrupts	<ul style="list-style-type: none"> • RESET • External 0 / Key Input • External 1 • External 2 / External 3 / External 4 / External 5 • Timer 0 • Timer 1 / PWM • Timer 2 • Timer 3 / A/D • Timer 4 • Serial 0 • Serial 1 / UART • Runaway 		
Timer Counter	Timer Counter 0 : 16-bit x 1 (Synchronous Output [4-bit x 1ch])		
	Clock Source1/2 of System Clock, 1/16 of OSC Oscillation Clock		
	Interrupt SourceOverflow of Timer Counter 0, Coincidence of Output Compare Register 0 and Timer Counter 0		
	Timer Counter 1 : 16-bit x 1 (Timer Output, Event Count)		
	Clock Source1/2 of System Clock, 1/16 of OSC Oscillation Clock, External Clock		
	Interrupt SourceOverflow of Timer Counter 1		
	Timer Counter 2 : 16-bit x 1 (Input Capture, PWM Output)		
Clock Source1/2 of System Clock, 1/16, 1/24 of OSC Oscillation Clock			
Interrupt SourceOverflow of Timer Counter 2, Specified Edge of TC1O2			
Timer Counter 3 : 16-bit x 1 (Generation of A/D converter trigger, Serial Index Search)			
Clock Source1/2 of System Clock, 1/16 of OSC Oscillation Clock			
Interrupt SourceOverflow of Timer Counter 3			
Timer Counter 4 : 16-bit x 1 (Event Count, Synchronous Serial Clock Generator)			
Clock Source1/16 of OSC Oscillation , External Clock Input			
Interrupt SourceOverflow of Timer Counter 4 (Switch to Timer Counter 5)			
Timer Counter 5 : 16-bit x 1 (Watchdog, Time Base, Clock function)			
Clock Source1/4 of OSC Oscillation Clock, XI Oscillation Clock			
Interrupt Source1/2048, 1/4096, 1/8192 of Timer Counter 5 (Switch to Timer Counter 4)			
Serial Interface	Serial : 8-bit x 2 (Synchronous Type) (Transfer direction of MSB/LSB selectable, Start Condition function, Serial transfer Index Search)		
	Clock Source1/4, 1/16, 1/32 of System Clock, External Clock, 1/2 of Timer Counter 4		
UART x 1 (8-bit Baud Rate Timer built-in)			
I/O Pins	I/O	58	• Common use : 27 • Input/Output selectable (P0, P1, P4 to 6, P9 : by-bit, P3, P7 : by-byte)
	Input	15	• Common use : 15 • A/D Input selectable (P8 : by-bit)
A/D Inputs	8-bit x 8ch (without S/H)		
PWM	16-bit x 1ch (at Repetition Cycle 0.80µs to 26.2ms, 20MHz), 10-bit x 1ch (at Repetition Cycle 0.4 to 204.8µs, 20MHz)		
ICR	16-bit x 1ch		
OCR	16-bit x 1ch		

MN1880024 / 4824 / 3224 / 2424 □

Special Ports	Synchronous Output (4-bit x 1ch)
Expanded Memory Access Mode	High-speed bus mode/standard bus mode function * A memory-wait addition function is available during the high-speed mode on the MN1884824 / 3224 / 2424 MN18P86424 only.
Package	MN1880024 / 4824 / 3224 / 2424: QFP084-P-1818E MN1880024 / 4824: QFH084-P-1212

Electrical Characteristics

Supply Current

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating Supply Current	IDD1	At 20MHz Opeation			70	mA
	IDD2	At 32kHz Operation			5	mA
Supply Current at STOP	IDD3	Oscillation halt			50	μA
Supply Current at HALT	IDD4	20MHz Oscillaiton halt			500	μA

(Ta= -20 to +70°C, VDD=5.0V, VSS=0V)

A/D Converter Characteristics


Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
A/D Conversion Linearity Error					±2	LSB
Zero Transition Voltage	VOT				500	mV
Full-scale Transition Voltage	VFT		4500			mV
A/D Conversion Time		fosc=20MHz, at High Speed A/D Conversion			2.60	μs
Analog Input Voltage	VIA		Vref-		Vref+	V

(Ta=25°C, VDD=5.0V, VSS=0V)

Support Tool

In-Circuit Emulator	Mr. ICE / 1880 (made by Computex Co. Ltd.) For 18mm x 18mm package only PX-ICE1880-2
EPROM built-in Type	Use MN18P86424

Pin Assignment

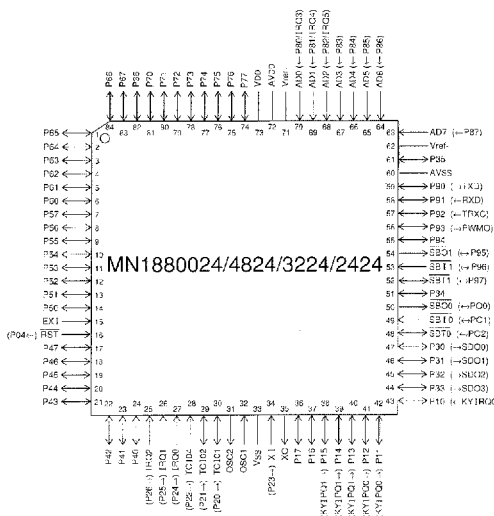

QFP084-P-1818E (MN1880024 / 4824 / 3224 / 2424)
QFH084-P-1212 (MN1880024/4824)